

# OFF-GRID INVERTER

• Pure sine wave inverter

## RG-MSPD SERIES



RG-MSPD 1.5K / 3K

RG-MSPD 5K/MSPT5K



- Built-in 2 or 3 strings of MPPT solar charge controller depending on models
- Enhanced AC charger to 60A
- Wide battery input range
- Selectable input voltage range for home appliances and personal computers
- Selectable high power charging current


- Configurable AC/Solar input priority via LCD setting
- Compatible with mains voltage or generator power
- Auto restart while AC is recovering
- Overload and short circuit protection
- Optional SNMP card
- Parallel operation with up to 9 units only available for 5KVA

# RG-MSPD/MSPT SERIES OFF-GRID INVERTER

MODEL	RG-MSPD 1.5K-12	RG-MSPD 1.5K-48	RG-MSPD 3K-24	RG-MSPD 3K-48	RG-MSPD/U 5K	RG-MSPD/U 5K
Rated Power	1500VA/1200W		3000VA/2400W		5000VA/5000W	
<b>INPUT</b>						
Voltage	230 VAC					
Selectable Voltage Range	170-280 VAC (For Personal Computers) 90-280 VAC (For Home Appliances)					
Frequency Range	50 Hz/60 Hz (Auto sensing)					
<b>OUTPUT</b>						
AC Voltage Regulation (Batt. Mode)	230VAC ± 5%					
Surge Power	3000VA		6000VA		10000VA	
Efficiency (Peak)	90%					
Transfer Time	10 ms (For Personal Computers) 20 ms (For Home Appliances)					
Waveform	Pure sine wave					
<b>BATTERY</b>						
Battery Voltage	12 VDC	48 VDC	24 VDC	48 VDC	48 VDC	48 VDC
Floating Charge Voltage	13.5 VDC	54 VDC	27 VDC	54 VDC	54 VDC	54 VDC
Overcharge Protection	16 VDC	62 VDC	32 VDC	62 VDC	60 VDC	60 VDC
<b>SOLAR CHARGER &amp; AC CHARGER</b>						
Maximum PV Array Power	1000W	2000W	2000W	3000 W	6000W	9000W
MPPT Range @ Operating Voltage	15~80 VDC	60 ~ 90 VDC	30~80 VDC	60 ~ 90 VDC	60~115 VDC	
Maximum PV Array Open Circuit Voltage	100 VDC				145 VDC	
Maximum Solar Charge Current	40A x 2	20A x 2	40A x 2	30A x 2	60A x 2	60A x 3
Maximum AC Charge Current	60 A	30 A	60 A	60 A	60 A	60 A
Maximum Charge Current	140 A	70 A	140 A	120 A	180 A	240 A
Maximum Efficiency	98%					
<b>PHYSICAL</b>						
Dimension, DxWxH(mm)	124 x 272 x 400				194 x 295 x 455	
Net Weight (kgs)	8.0				16	17
<b>ENVIRONMENT</b>						
Humidity	5% to 95% Relative Humidity (Non-condensing)					
Operating Temperature	-20°C to 55°C				0°C to 55°C	
Storage Temperature	-30°C to 60°C				-15°C to 60°C	

Product specifications are subject to change without further notice.

## 1 Solar Power and AC Power available

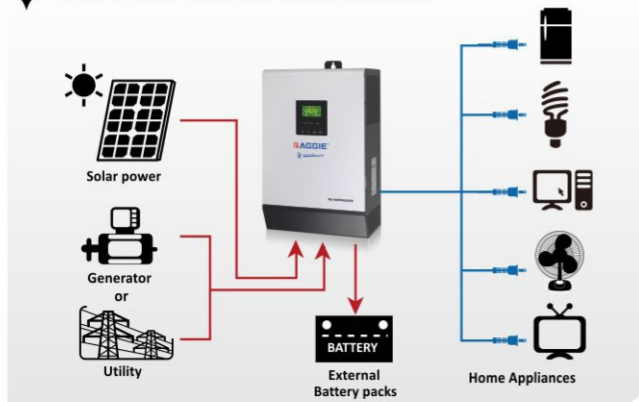

## 2 Solar Power and AC Power not available

